# **GIB SYLVANIA**

AIR SUSPENSION SPEAKER


MODEL: FS48A

## FACTORY PREPARED TECHNICAL SERVICE DATA

SERVICE PUBLICATIONS DEPARTMENT

Entertainment Products Group

700 Ellicott Street - Batavia, N.Y.

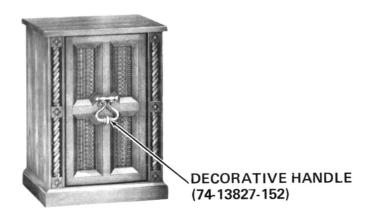


#### - SPEAKER REMOVAL----


Air Suspension Speaker systems require a complete seal around all openings. Exercise caution in removal and replacement of speakers to insure an air-tight seal.

- 1. Remove backcover.
- 2. Remove screws from woofer enclosure and lift out.
- 3. Remove screws from speaker and lift from housing. Disconnect leads from speaker. Be sure to observe correct phasing when installing speakers. Commercial Mortite can be used for an air-tight mounting by forming a bead around the rim.

MODEL: FS48A

## ----- SPEAKER WIRING DIAGRAM

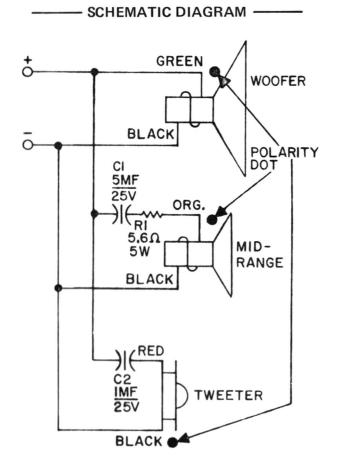

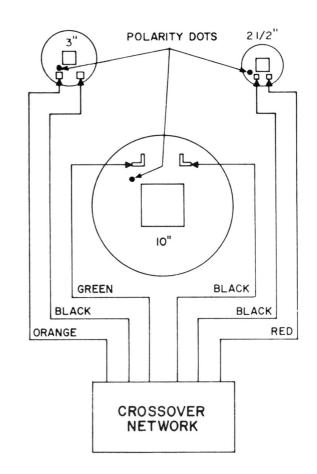


IMPORTANT: Always use genuine Sylvania replacement parts and tubes.

----- MODEL: F\$48A -----

#### - REPLACEMENT PARTS LIST ----

SERVICE PART NO.	DESCRIPTION
85-38057-1 41-14304-1 41-14304-3 73-10302-33 73-10302-29 73-34828-4 74-13827-152 85-32713-1 85-32586-3 36-62454-19 12-26977-2 12-26878-1 12-32413-2 89-31022-1	Baffle - Speaker Capacitor 1MF/25V Capacitor 5MF/25V Connector Kit - Plug Connector Kit - Receptacle Cord - Speaker Decorative Handle Enclosure - Speaker Gasket - Speaker Resistor - 5.6 ohm, 5W Speaker - 2 1/2" PM Speaker - 3" PM Speaker - 10" PM Speaker - Jack Holder

### ----- CROSSOVER NETWORK-

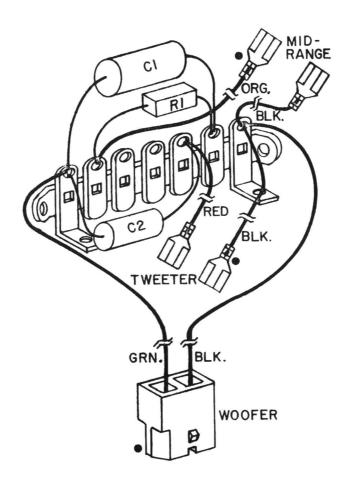

Printed in U. S. A. 756